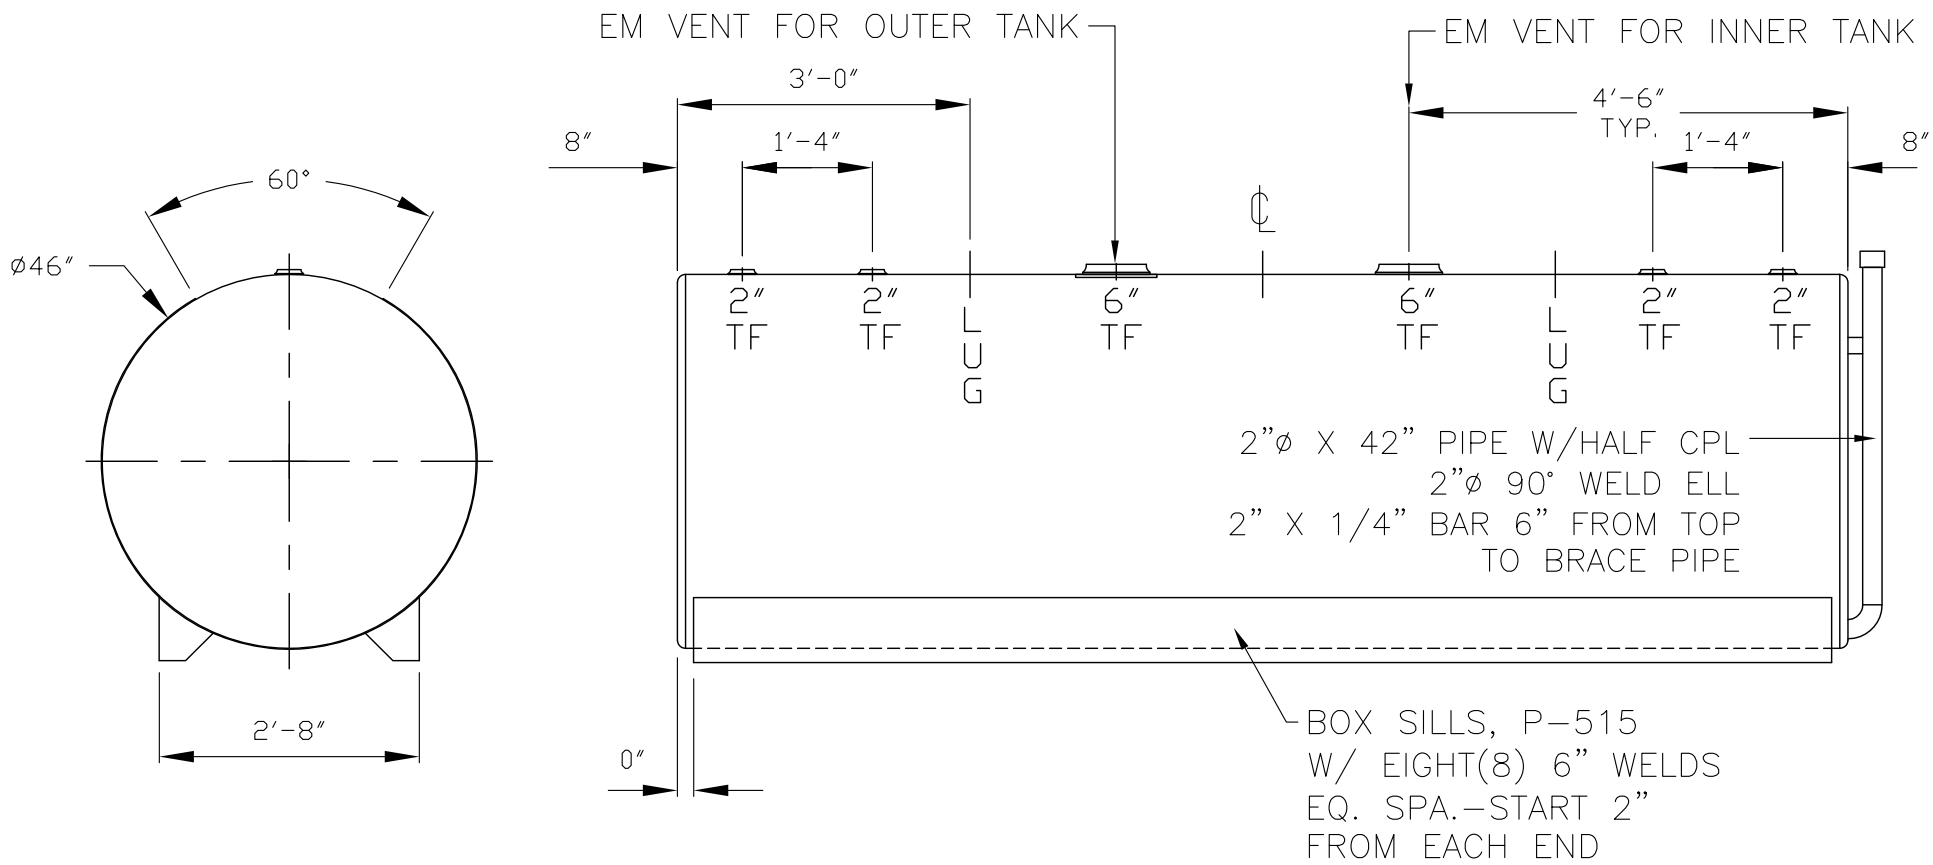

NOTES:
1. CLEAN TANK COMPLETELY AFTER WELDING.
2. INSPECT TANK FOR UNDERCUT & CONCAVE WELDS BEFORE TESTING.
3. SECOND TEST TANK AFTER SILLS ARE WELDED.
4. ALL FITTINGS TO BE FPT-UNO.
5. VACUUM TEST TANK FOR FINAL TEST.

FSDW1000ULSKT46D

STEEL TANK & FABRICATING CORP.

COLUMBIA CITY, INDIANA 46725
800-852-9102/260-248-8971/FAX 260-248-8973

DESCRIPTION:	1000 GAL FLAMESHIELD SKID TANK WITH 300° WRAP			FOR:	*AVALON PETROLEUM KANKAKEE, IL*		
QUANTITY:	ONE (1)	CAPACITY:	1000 GAL.	PAINT:	T.B.D./BLAST IF REQ'D		
DIAMETER:	46"	LENGTH:	144"	LABEL:	UL-142	DRAWN BY: *AMK*	DATE: 3/29/18	CHECKED BY: –
MATERIAL:	MCS	HEADS:	INNER 10GA. OUTER 12GA.	SHELL:	INNER 10GA. OUTER 12GA.	SCALE:	N.T.S.	
CUSTOMER ORDER #:	–	STAFCO ORDER #:	–	FILENAME:	FSW1000ULSKT46D.DWG		SHEET 1 OF 1